





The **Synerji Floodlights** have proven to be dependable and durable in the market, especially in areas with an erratic electricity supply. They have an aluminium body with tempered glass and stainless-steel screws. Recommended for general lighting of outside areas, from domestic gardens to large parking areas and sports fields.

All Synerji Floodlights comply with the IEC 60598 standard.

CONTENTS

LED Slim Floodlights 10W/20W/30W	82
NEW LED Slim Floodlights with IP65 PIR 10W/20W/30W	83
LED Slim Floodlights with IP44 PIR 10W/20W/30W	84
LED Slim Floodlights 10W/20W 12V	85
LED Slim Floodlights 50W/100W	86
LED Slim Floodlights 150/200W	87
LED MCOB Floodlights 300W/400W	88

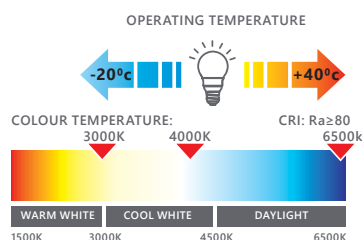


SLIM FLOODLIGHT


10W | 20W | 30W




DIMENSIONS

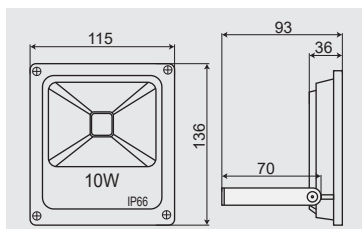

DIMENSIONS

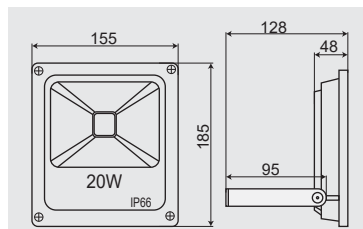

DIMENSIONS

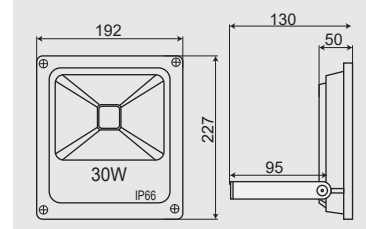


10W 720lm LUMENS	20W 1560lm LUMENS	30W 2450lm LUMENS	120° BEAM ANGLE	35000 LIFESPAN HRS	0.95 POWER FACTOR	IP66 RATING	3000K WARM WHITE	4000K COOL WHITE	6000K DAYLIGHT
-------------------------------	--------------------------------	--------------------------------	------------------------------	---------------------------------	--------------------------------	-----------------------	-------------------------------	-------------------------------	--------------------------


NEW SLIM FLOODLIGHT

10W | 20W | 30W PIR WITH IP65 RATING


AUTOMATIC SENSOR SETTINGS AND EXPLANATION

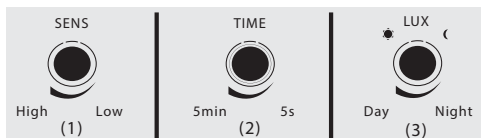


DIMENSIONS



DIMENSIONS



DIMENSIONS




10W 720lm LUMENS	20W 1560lm LUMENS	30W 2450lm LUMENS	120° BEAM ANGLE	35000 LIFESPAN HRS	0.95 POWER FACTOR	IP65 RATING	3000K WARM WHITE	4000K COOL WHITE	6000K DAYLIGHT
-------------------------------	--------------------------------	--------------------------------	------------------------------	---------------------------------	--------------------------------	-----------------------	-------------------------------	-------------------------------	--------------------------

SLIM FLOODLIGHT

10W | 20W | 30W IP44 PIR

AUTOMATIC SENSOR SETTINGS AND EXPLANATION

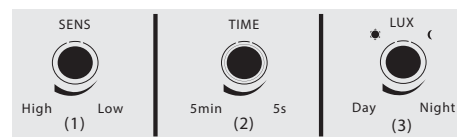

SYLF010WBKSLMPIR




SYLF020WBKSLMPIR




SYLF030WBKSLMPIR


DIMENSIONS

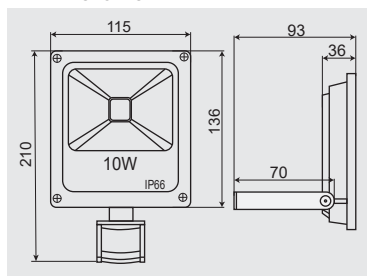

DIMENSIONS

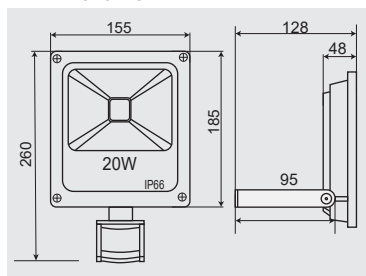

DIMENSIONS

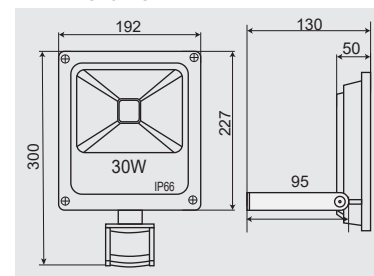

10W
720lm
LUMENS

20W
1560lm
LUMENS

30W
2450lm
LUMENS

120°
BEAM
ANGLE

35000
LIFESPAN
HRS

0.95
POWER
FACTOR

IP65
RATING

IP44
PIR

3000K
WARM
WHITE

4000K
COOL
WHITE

6000K
DAYLIGHT

SLIM FLOODLIGHT


10W | 20W 12V




SYLF020WBKSLMDL12V

SYLF010WBKSLMDL12V

DIMENSIONS

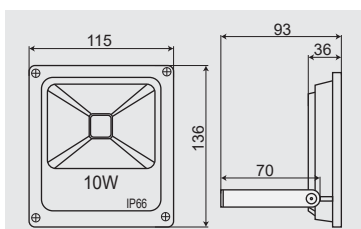

DIMENSIONS

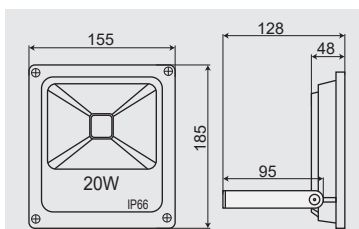

10W 720lm LUMENS	20W 1560lm LUMENS	120° BEAM ANGLE	35000 LIFESPAN HRS	0.95 POWER FACTOR	IP66 RATING	6000K DAYLIGHT
-------------------------------	--------------------------------	------------------------------	---------------------------------	--------------------------------	-----------------------	--------------------------

SLIM FLOODLIGHT

50W | 100W



SYLF050WBKSLMDL




SYLF100WBKSLMDL




IP66 Connector fitted for quick wire connection

DIMENSIONS

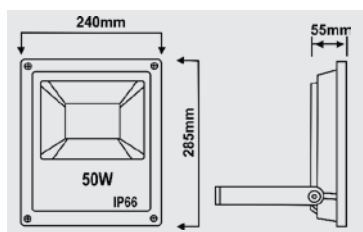

DIMENSIONS

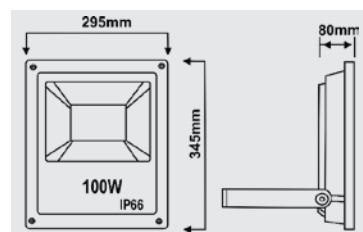

50W 3980lm LUMENS	100W 7800lm LUMENS	IP66 CONNECTOR	6000K DAYLIGHT	120° BEAM ANGLE	35000 LIFESPAN HRS	0.95 POWER FACTOR	IP66 RATING
--------------------------------	---------------------------------	-------------------	--------------------------	------------------------------	---------------------------------	--------------------------------	-----------------------

SLIM FLOODLIGHT

150W | 200W



SYLF150WBKSLMDL




SYLF200WBKSLMDL




IP66 Connector fitted for quick wire connection

DIMENSIONS

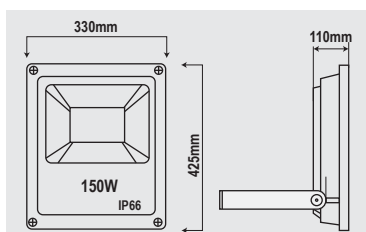

DIMENSIONS

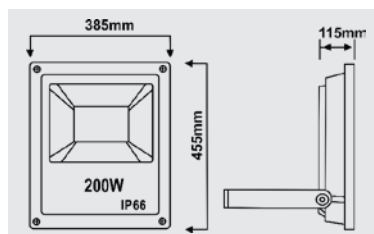

150W 12260lm LUMENS	200W 16800lm LUMENS	IP66 CONNECTOR	6000K DAYLIGHT	120° BEAM ANGLE	35000 LIFESPAN HRS	0.95 POWER FACTOR	IP66 RATING
----------------------------------	----------------------------------	-------------------	--------------------------	------------------------------	---------------------------------	--------------------------------	-----------------------

COB FLOODLIGHT


300W | 400W




SYLF300WBKDL

SYLF400WBKDL

DIMENSIONS - 300W

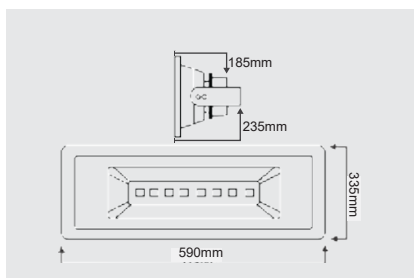

DIMENSIONS - 400W

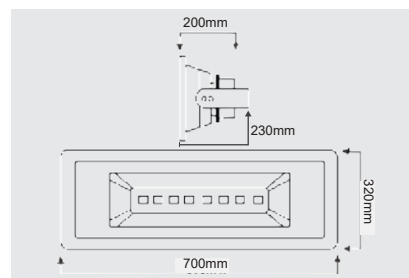

300W 27000lm LUMENS	400W 35800lm LUMENS	6000K DAYLIGHT	120° BEAM ANGLE	35000 LIFESPAN HRS	0.95 POWER FACTOR	IP66 RATING
----------------------------------	----------------------------------	--------------------------	------------------------------	---------------------------------	--------------------------------	-----------------------



