





Fuse Cutout

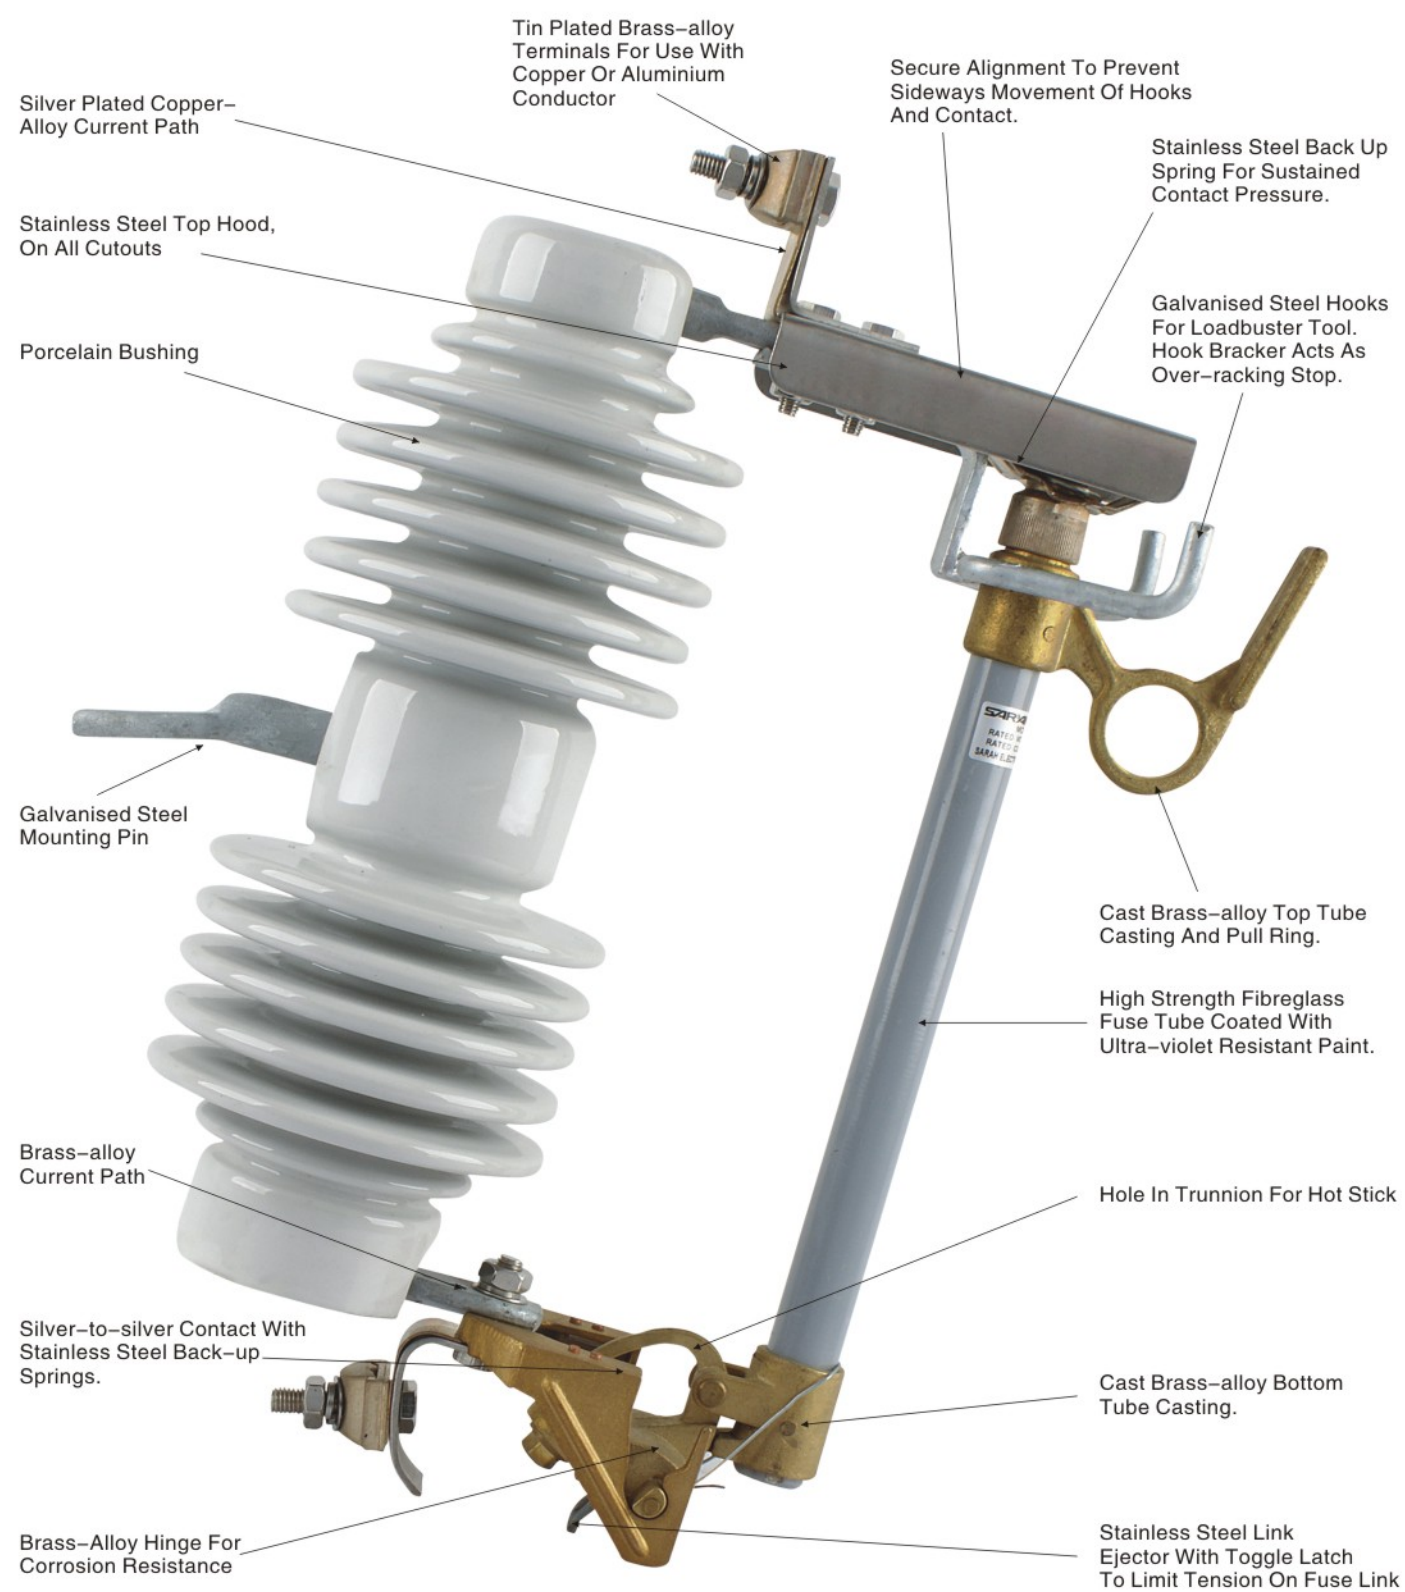

Fuse Cutout



Mounting Bracket. Adjustable
For 3" x4" to 4" x5" Cross Arm.
Furnished Only When Catalogue Number Suffix
"B" or "C" Is Specified

Optional Parallel
Groove Connector Shown Furnished
Only When Cataloge Number _____
Suffix "D" Is Specified

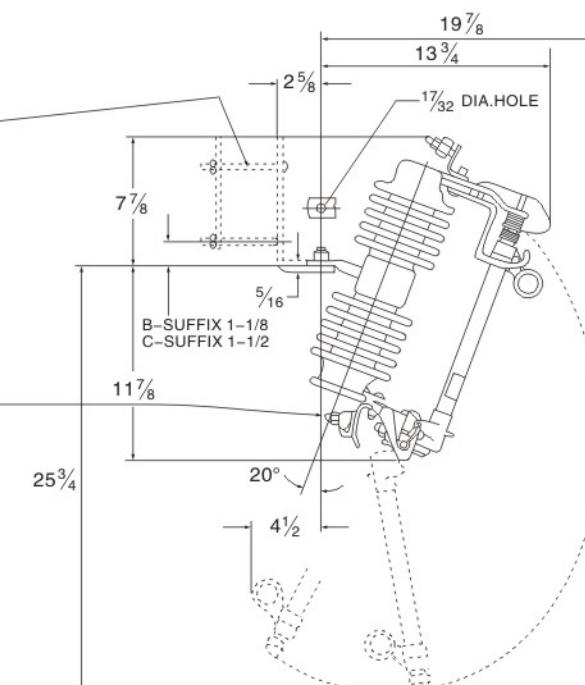


Notes:


(NEMA 'B' Bracket.) Dimension Is 53/16 For
'B' Suffix Fuerte Extended Bracket. 'D' Suffix Only.

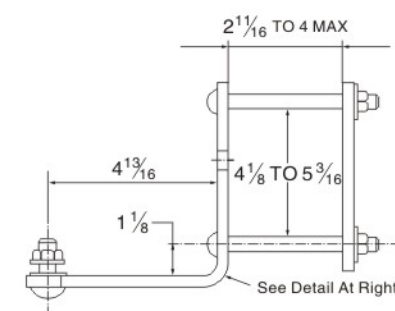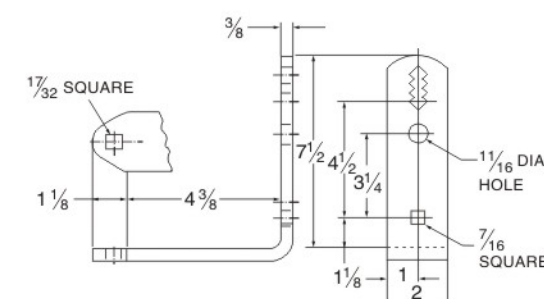

Extended Mounting Bracket-Adjustable
for 1"x4" to 4"x5" Crossarm



NEMA Type B Mounting Bracket—Adjustable
for 3"x4"to4"x5" Crossarm

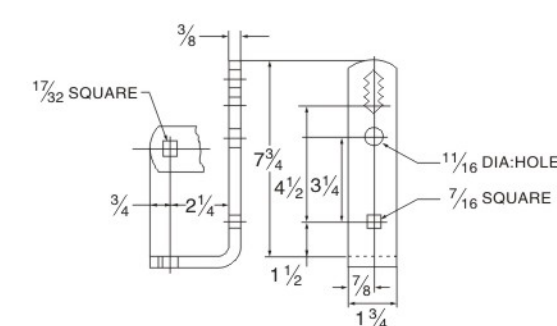



Fuse Cutout Porcelain Type



Model No.	Rated Voltage (kV)	Rated Current (A)	Breaking Current (kA)	Impulse Voltage BIL (kV)	Power-Frequency Withstand Voltage (kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (cm)
SJC-1	10-15	100	8	110	40	250	6.8	40.5 × 30.5 × 10.5
		200	10	110	40	250	7.0	



Model No.	Rated Voltage (kV)	Rated Current (A)	Breaking Current (kA)	Impulse Voltage BIL (kV)	Power-Frequency Withstand Voltage (kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (cm)
SJC-5	15-27	100	8	125	45	320	8.5	50 × 32 × 11.5
		200	10	125	45	320	8.7	



Model No.	Rated Voltage (kV)	Rated Current (A)	Breaking Current (kA)	Impulse Voltage BIL (kV)	Power-Frequency Withstand Voltage (kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (cm)
SJC-9	24-27	100	8	150	65	490/530	10.5	50 × 32.5 × 15.5
		200	10	150	65	490/530	10.7	



Model No.	Rated Voltage (kV)	Rated Current (A)	Breaking Current (kA)	Impulse Voltage BIL (kV)	Power-Frequency Withstand Voltage (kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (cm)
SJC-13	33-38	100	6	170	75	660	13/14	59.5 × 32 × 16
		200	8	170	75	660	13.2/14.2	



Model No.	Rated Voltage (kV)	Rated Current (A)	Breaking Current (kA)	Impulse Voltage BIL (kV)	Power-Frequency Withstand Voltage (kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (cm)
SJC-13B	33-38	100	6	180	90	720	13/14	59.5 × 32 × 16
		200	8	180	90	720	13.2/14.2	



Load Breaker Fuse Cutout Porcelain Type



Model No.	Rated Voltage (kV)	Rated Current (A)	Breaking Current (kA)	Impulse Voltage BIL (kV)	Power-Frequency Withstand Voltage (kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (cm)
LBSJC-1	10-15	100	8	110	40	250	7.3	45 × 34 × 10.5
		200	10	110	40	250	7.5	



Model No.	Rated Voltage (kV)	Rated Current (A)	Breaking Current (kA)	Impulse Voltage BIL (kV)	Power-Frequency Withstand Voltage (kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (cm)
LBSJC-5	15-27	100	8	125	45	320	9.0	55 × 36 × 11.5
		200	10	125	45	320	9.2	



Model No.	Rated Voltage (kV)	Rated Current (A)	Breaking Current (kA)	Impulse Voltage BIL (kV)	Power-Frequency Withstand Voltage (kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (cm)
LBSJC-9	24-27	100	8	150	65	490/530	11	55 × 36 × 15.5
		200	10	150	65	490/530	11.2	



Model No.	Rated Voltage (kV)	Rated Current (A)	Breaking Current (kA)	Impulse Voltage BIL (kV)	Power-Frequency Withstand Voltage (kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (cm)
LBSJC-13	33-38	100	6	170	75	660	13.2/14.2	64 × 38 × 15.3
		200	8	170	75	660	13.5/14.5	



Model No.	Rated Voltage (kV)	Rated Current (A)	Breaking Current (kA)	Impulse Voltage BIL (kV)	Power-Frequency Withstand Voltage (kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (cm)
LBSJC-13B	33-38	100	6	180	90	720	13.2/14.2	64 × 38 × 15.3
		200	8	180	90	720	13.5/14.5	



Fuse Cutout Polymer Type



Model No.	Rated Voltage (kV)	Rated Current (A)	Breaking Current (kA)	Impulse Voltage BIL (kV)	Power-Frequency Withstand Voltage (kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (cm)
SJC-17	12-15	100	8	110	45	350	3.8	41 × 30 × 14.5
		200	8	110	45	350	4.0	



Model No.	Rated Voltage (kV)	Rated Current (A)	Breaking Current (kA)	Impulse Voltage BIL (kV)	Power-Frequency Withstand Voltage (kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (cm)
SJC-18	24-27	100	6	150	65	540	4.5	48 × 34.5 × 14.5
		200	6	150	65	540	4.7	



Model No.	Rated Voltage (kV)	Rated Current (A)	Breaking Current (kA)	Impulse Voltage BIL (kV)	Power-Frequency Withstand Voltage (kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (cm)
SJC-18B	24-27	100	6	150	65	630	4.5	48 × 34.5 × 14.5
		200	6	150	65	630	4.7	



Model No.	Rated Voltage (kV)	Rated Current (A)	Breaking Current (kA)	Impulse Voltage BIL (kV)	Power-Frequency Withstand Voltage (kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (cm)
SJC-19	33-38	100	6	180	90	720	5	58 × 34.5 × 14.5
		200	6	180	90	720	5.2	



Model No.	Rated Voltage (kV)	Rated Current (A)	Breaking Current (kA)	Impulse Voltage BIL (kV)	Power-Frequency Withstand Voltage (kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (cm)
SJC-25	33-38	100	6	200	95	1100	5.5	58 × 34.5 × 14.5
		200	6	200	95	1100	5.7	



Fuse Cutout Polymer Type



Model No.	Rated Voltage (kV)	Rated Current (A)	Breaking Current (kA)	Impulse Voltage BIL (kV)	Power-Frequency Withstand Voltage (kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (cm)
SJC-17K	12-15	100	8	110	45	350	3.8	41 × 30 × 14.5
		200	8	110	45	350	4.0	



Model No.	Rated Voltage (kV)	Rated Current (A)	Breaking Current (kA)	Impulse Voltage BIL (kV)	Power-Frequency Withstand Voltage (kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (cm)
SJC-18K	24-27	100	6	150	65	540	4.5	48 × 34.5 × 14.5
		200	6	150	65	540	4.7	



Model No.	Rated Voltage (kV)	Rated Current (A)	Breaking Current (kA)	Impulse Voltage BIL (kV)	Power-Frequency Withstand Voltage (kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (cm)
SJC-18BK	24-27	100	6	150	65	630	4.5	48 × 34.5 × 14.5
		200	6	150	65	630	4.7	



Model No.	Rated Voltage (kV)	Rated Current (A)	Breaking Current (kA)	Impulse Voltage BIL (kV)	Power-Frequency Withstand Voltage (kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (cm)
SJC-19K	33-38	100	6	180	90	720	5	58 × 34.5 × 14.5
		200	6	180	90	720	5.2	



Model No.	Rated Voltage (kV)	Rated Current (A)	Breaking Current (kA)	Impulse Voltage BIL (kV)	Power-Frequency Withstand Voltage (kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (cm)
SJC-25K	33-38	100	6	200	95	1100	5.5	58 × 34.5 × 14.5
		200	6	200	95	1100	5.7	



Load Breaker Fuse Cutout Polymer Type

LBSJC-17		Model No.	Rated Voltage (kV)	Rated Current (A)	Breaking Current (kA)	Impulse Voltage BIL (kV)	Power-Frequency Withstand Voltage (kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (cm)
		LBSJC-17	12-15	100	8	110	45	350	3.8	48 × 34.5 × 15
				200	8	110	45	350	4.0	
LBSJC-18		Model No.	Rated Voltage (kV)	Rated Current (A)	Breaking Current (kA)	Impulse Voltage BIL (kV)	Power-Frequency Withstand Voltage (kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (cm)
				100	8	150	65	540	4.5	55.5 × 39 × 14.5
				200	8	150	65	540	4.7	
LBSJC-18B		Model No.	Rated Voltage (kV)	Rated Current (A)	Breaking Current (kA)	Impulse Voltage BIL (kV)	Power-Frequency Withstand Voltage (kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (cm)
				100	8	150	65	540	4.5	55.5 × 39 × 15.5
				200	8	150	65	540	4.7	
LBSJC-19		Model No.	Rated Voltage (kV)	Rated Current (A)	Breaking Current (kA)	Impulse Voltage BIL (kV)	Power-Frequency Withstand Voltage (kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (cm)
				100	6	180	90	720	6.5	65 × 39 × 14.5
				200	6	180	90	720	6.7	
LBSJC-25		Model No.	Rated Voltage (kV)	Rated Current (A)	Breaking Current (kA)	Impulse Voltage BIL (kV)	Power-Frequency Withstand Voltage (kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (cm)
				100	6	200	95	1100	5.5	65 × 39 × 14.5
				200	6	200	95	1100	5.7	



Fuse Cutout

SJC-75		Model No.	Rated Voltage (kV)	Rated Current (A)	Breaking Current (kA)	Impulse Voltage BIL (kV)	Power-Frequency Withstand Voltage (kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (cm)
		SJC-75	24-27	100	12	180	65	750	4.6	48 × 34.5 × 15
				200	12	180	65	750	4.8	
SJC-113		Model No.	Rated Voltage (kV)	Rated Current (A)	Breaking Current (kA)	Impulse Voltage BIL (kV)	Power-Frequency Withstand Voltage (kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (cm)
				100	11	200	75	1130	6.0	55.5 × 39 × 14.5
				200	11	200	75	1130	6.2	
SJC-48		Model No.	Rated Voltage (kV)	Rated Current (A)	Breaking Current (kA)	Impulse Voltage BIL (kV)	Power-Frequency Withstand Voltage (kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (cm)
				100	12	150	65	480	4.5	55.5 × 39 × 14.5
				200	12	150	65	480	4.5	
SJC-36		Model No.	Rated Voltage (kV)	Rated Current (A)	Breaking Current (kA)	Impulse Voltage BIL (kV)	Power-Frequency Withstand Voltage (kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (cm)
				100	6	180	75	820	27.5	65 × 39 × 14.5
				200	8	180	75	820	27.5	
SJC-33		Model No.	Rated Voltage (kV)	Rated Current (A)	Breaking Current (kA)	Impulse Voltage BIL (kV)	Power-Frequency Withstand Voltage (kV)	Leakage Distance (mm)	Weight (kg)	Dimensions (cm)
				100	6	180	75	820	27.5	65 × 39 × 14.5
				200	8	180	75	820	27.5	



Fuse Cutout



Fuse Cutout Accessories

