






Pole Mounted Fuse Switch Disconnecter

APDM-1/160A

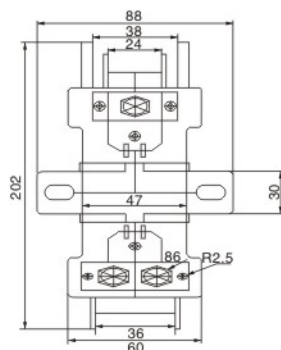



Bracket

Pole

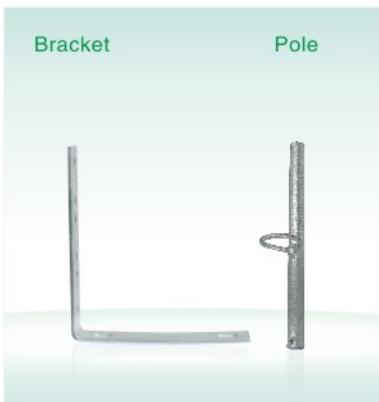

Model No.	APDM-1/160A	APDM-1/200A
Body/Carrier Material	Polyamide	Polyamide
Rated Operational Current	160 Amps	200Amps
Rated Operating Voltage	In	440 Volts, 50 Hz
Rated Insulation Voltage	Ue	1000 Volts
Rated Short Time Current	Ui	10 kA Rms For 0.5s With 17 kA Peak
Cable Size Up To	Icw	95 sq.mm.
Fuse Link	"NH" TYPE Size 1 & 2	
Dimensions	210X140X70 mm(Approx.)	
Weight	720Grams(Not Binding, Without Fuse)	

APDM-1/400A

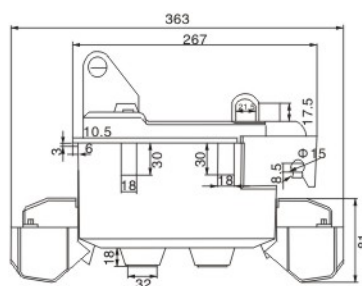

APDM-3/400A



Model No.	APDM-1/400A	APDM-1/630A
Body/Carrier Material	Polyamide	Polyamide
Rated Operational Current	400 Amps	630 Amps
Rated Operating Voltage	In	440 Volts, 50 Hz
Rated Insulation Voltage	Ue	1000 Volts
Rated Short Time Current	Ui	10 kA Rms For 0.5s With 17 kA Peak
Cable Size Up To	Icw	240 sq.mm.
Fuse Link	"NH" TYPE Size 1 & 2	
Dimensions	351X142X195 mm(Approx.)	
Weight	2.5Kgs(Not Binding, Without Fuse)	




Ready Board & Fuse

NAM-1



Ready Board

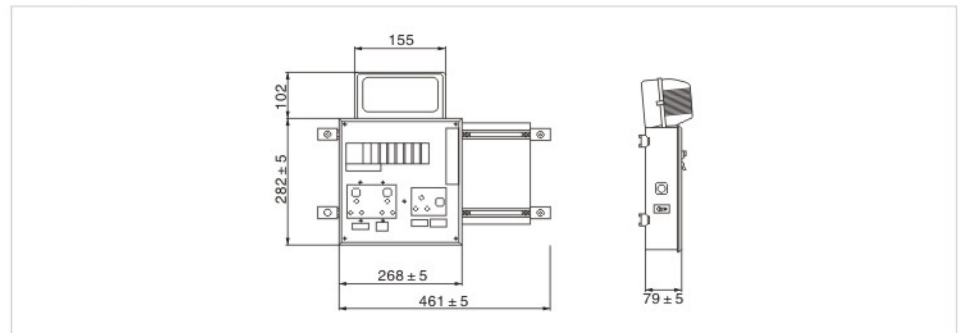


Model No.	Socket	MCB (A)	MCCB (A)
NAM-1	15A	63	63

BD-400 SP



Fuse Holder

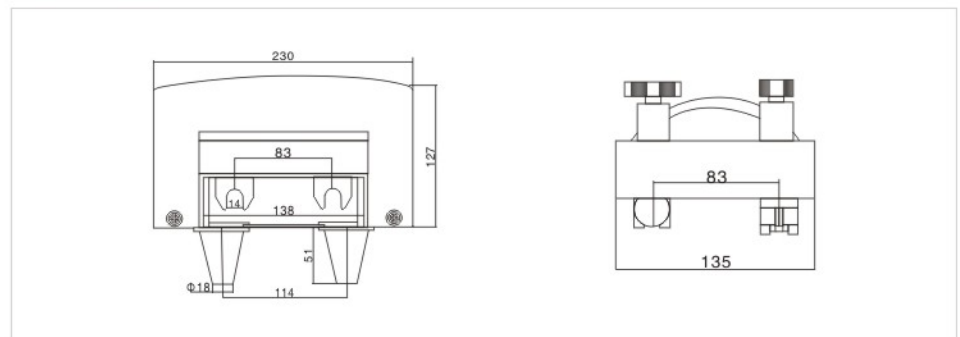


Model No.	Rated Voltage (V)	Rated Current (A)	Weight (kgs)
BD-400 SP	1000	400	2.0

LCF1

LCF2



Low Voltage Cutout Fuse

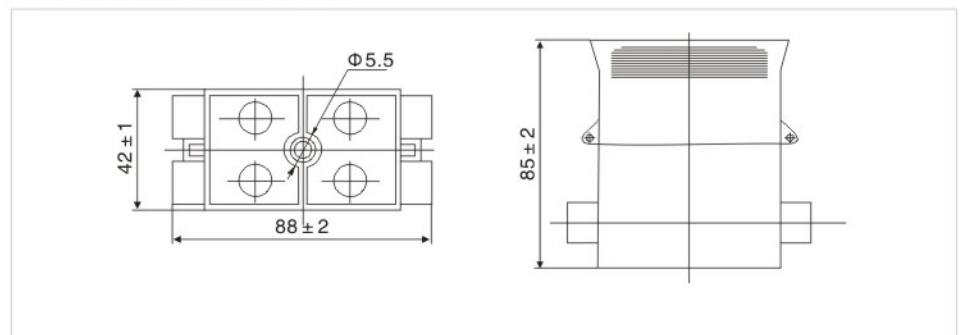

Model No.	Matched With Fuse Body	Rated Voltage (V)	Convention Heating Current (A)	Weight (g)
LCF1	22 × 58	550AC	60/80/100	247
LCF2	30 × 57	550AC	60/80/100	252